TECHNIQUE

T21-ER10 PRO

CEMB 1946

THE SMALLEST 3D BALANCER WITH LASER LINE



AUT · MANUAL LOCKING · VIRTUAL · AutoAdaptive · LASER

BRAKE · APPROACH · TOUCH · GP

CEMB

GARAGE EQUIPMENT

T21-ER10 PRO


- **Data entry via automatic gauge** to measure the distance and diameter of rims of up to 28”
- **Virtual Sonar** for 3D measurements of wheels that, in cases of metal rims and absence of sonar, calculates the width of the rim
- **AutoAdaptive Mode** - The new tolerance calculation system
- **Panel with Touch system,** innovative, simple and durable. Allows intuitive use of all machine functions
- **Electromagnetic brake** for the lock of the wheel in the exact weight position
- **Automatic approach** of the wheel within 15° from the point of application of the balancing weight, to allow the operator to position it correctly, with minimum movement
- **New correction mode with LASER line** for quick and intuitive positioning of the adhesive weights inside the rim
- Software programs for the professionals: **SPLIT, OPT, ALU**
- **ALU-S 3D Balancing mode** - Adhesive weights on the internal rim planes with specific counterweight position indicator
- **Low balancing speed**
- Latest generation **VDD Virtual Direct Drive** - Super-fast and extremely accurate measuring system



Virtual Sonar

INNOVATIVE 3D SOFTWARE THAT CALCULATES RIM WIDTH

- After acquiring the position of the first plane of correction, the new software **Virtual Sonar** calculates the width of the rim, identifying a possible range of external correction planes.
- During the measurement spin, **Virtual Sonar** verifies that it is possible to fall within the tolerance with the correction indicated on all possible external planes.
- If there is even one possible plane for which the required correction does not allow the residual unbalance to fall within the tolerance range (calculated with AutoAdaptive software), the machine will request manual entry of the rim width in mm.

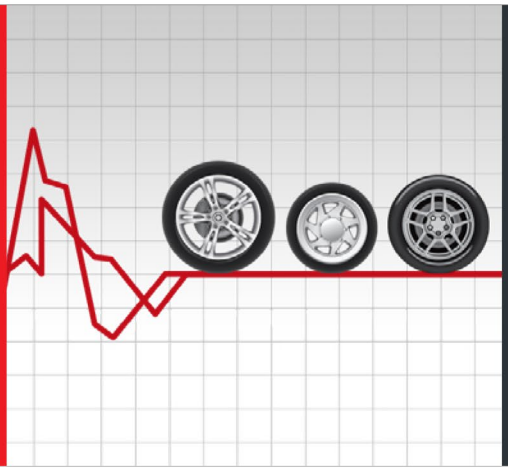

AutoAdaptive Mode

THE NEW TOLERANCE CALCULATION SYSTEM

- The innovative tolerance calculation system **AutoAdaptive Mode** is based on the evaluation of the residual imbalance limit value corresponding to an acceptable perceived vibration. For each wheel that is balanced, the software **AutoAdaptive Mode** detects weight and dimensions and calculates the tolerance value that will cancel any vibration perceived on the steering wheel. **AutoAdaptive Mode** grants the highest comfort when driving and saves balancing time.

- **CORRECTION WITH H.6 LINE LASER**




- **ERGONOMIC WEIGHT APPLICATOR** for quick and error-free operations
- **COMPACT**
  ideal for workshops with limited space
- **TECHNOLOGICAL**
  with advanced software included as standard



CEMB INNOVATIONS

AUTOMATIC APPROACH

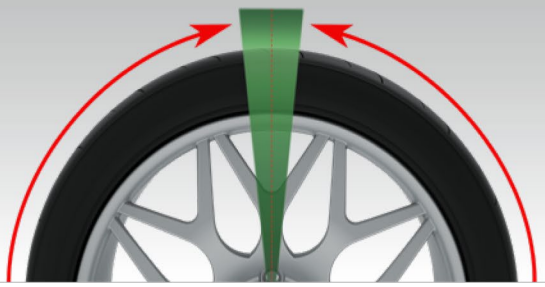

Automatic Approach

AUTOMATIC APPROACH TO THE CORRECTION POSITION

Once the measuring launch is completed, the wheel automatically stops around 15° from the exact point of application of the counterweight, allowing the operator to position it correctly with a little movement. After the first plane correction, pressing start/repositioning button the wheel will be repositioned around the second correction point.

STANDARD ACCESSORIES

In 1952 Cemb created the cone adapters for balancing machines and since then the company continued developing and producing high precision centering systems for any type of wheel. **Cemb does not recommend the use of non-original adapters on its balancing machines.**

UC20/2 GL40

Standard equipment UC20/2 GL40 composed of quick locknut GL40 and 3 cones kit

MANUAL LOCKING



LOCKNUT KIT - 41FF83146
Locknut Kit (quick locknut GL40, with sleeve and ring)



3 CONES KIT - 41FF034416
Ø 45÷110 mm,
pincer-hammer and 60 g. counterweight

Wheels with special dimensions, geometry and centring may require the use of special flanges that CEMB supplies as an option, to better meet the needs of the market. **For more information see the complete brochure on the web site: www.cemb.com**




Zero Weight /Easy Weight Lifts

OPTIONS TO REDUCE ANY EFFORT

- **PERFECT CENTERING** for a more accurate balancing
- **"ZERO WEIGHT" EFFECT** The patented system detects the weight of the wheel and cancels it automatically
- **ERGONOMICS** to minimize the effort for the operator
- **UNIVERSALS** Applicables to any CEMB balancing machine



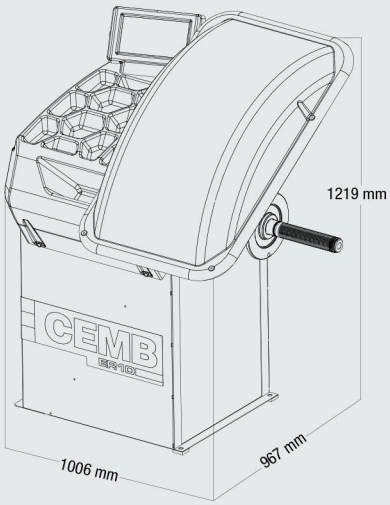

Single phase power supply	230V/1ph/50 hz
	115V/1ph/60 Hz
Max. absorbed power	0,65 kW
Balancing speed	100 rpm
Measuring cycle for 15 kg (33 lb) wheel	4.7 s
Measurement uncertainty	± 0.5g
Avarage noise	< 70 dB (A)
Rim width setting range	1.5" ÷ 20" / 40 ÷ 510 mm
Rim diameter setting range	10" ÷ 30" / 265 ÷ 765 mm
Max. wheel weight	< 75 kg
Machine weight	110 kg

dmf (WAKEFIELD) LTD
Head Office: DMF Wakefield Ltd - 66 Wakefield Road, Ossett, Wakefield, WF5 9JS.
(01924) 370685 sales@dmfwakefield.co.uk www.dmfwakefield.co.uk